


TYPICAL INSTALLATION (STREET, ALLEY, DIRT ROAD OR SHOULDER)

NTS

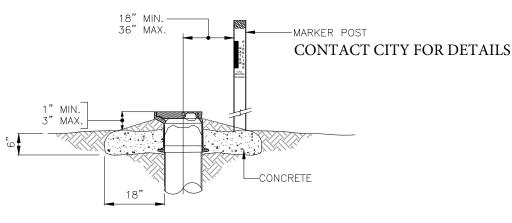

TYPICAL INSTALLATION (UNTRAVELED AREAS)


NTS


NOTES:


WHERE VALVE OPERATING NUT IS GREATER THAN 48" BELOW THE SURFACE, AN EXTENSION ROD FOR VALVE OPERATION, WITH CIRCULAR CENTERING GUIDE, SHALL BE REQUIRED. THE TOP OF THE EXTENSION ROD SHALL BE MIN. 24" AND MAX. 48" BELOW THE SURFACE

- 1. FOR VALVE OPERATOR WELL CAP SEE STD. DRAWING W-12.1
- 2. FOR MARKER POST SEE STD. DRAWING W-12 (CONTACT CITY FOR DETAILS)
- 3. *PER TRENCH BACKFILL DRAWING -COC STD. W-5
- . **DEFINED AS 6 MONTHS OR OLDER

APPROVED:		CITY OF CO	ACHELLA	
	VAL	DETAIL OF DOMESTIC WATER VALVE OPERATOR WELL INSTALLATION		
R.C.E. 72868				
EXP. 6/30/24		AUGUST 2023	DRAWING NUMBER:	: W-12

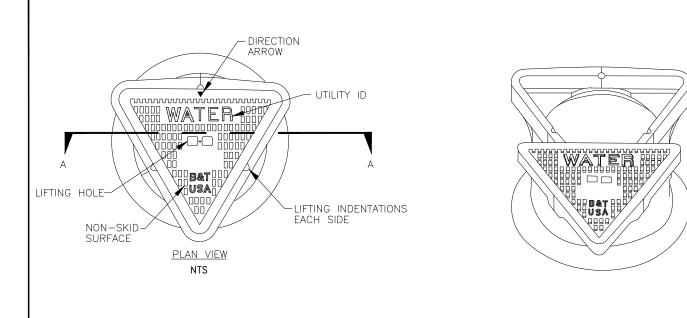

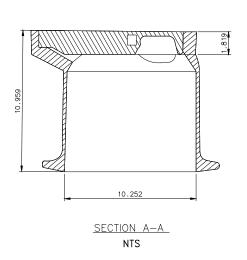

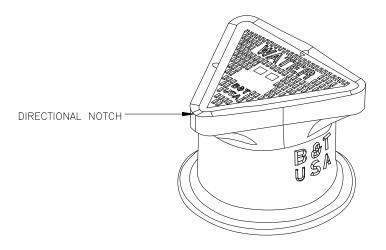

NOTES:

- ALL METALLIC MATERIALS SHALL BE CAST IRON OR DUCTILE IRON.
 FRAME AND LID SHALL HAVE CAST SEAT AND SIDE TO ASSURE CLOSE FIT.
- FOR INSTALLATION, SEE STANDARD DRAWING W-12
 FRAME AND LID SHALL EXCEED H-20 WHEEL LOADING.
- 5. APPROVED MODELS:
- 10 INCH HEAVY MARK V TRI RIM W/FLANGE MODEL NO. GRE10RTF MANUFACTURED BY BINGHAM & TAYLOR 10 INCH MARK V TRI LID CVWD—WATER YELLOW POWDER MODEL NO. CUL10LTCVWD—W MANUFACTURED BY BINGHAM & TAYLOR CONFIRM COLOR WITH CITY PRIOR TO ORDERING

APPROVED:	CITY OF (COACHELLA	
R.C.E. 72868		AIL OF DOMESTIC WATER VALVE ERATOR WELL CAP AND FRAME	
EXP. 6/30/24	AUGUST 2023	DRAWING NUMBER: W-12.1	